


Axellent Product information

» X-Guard® Doors

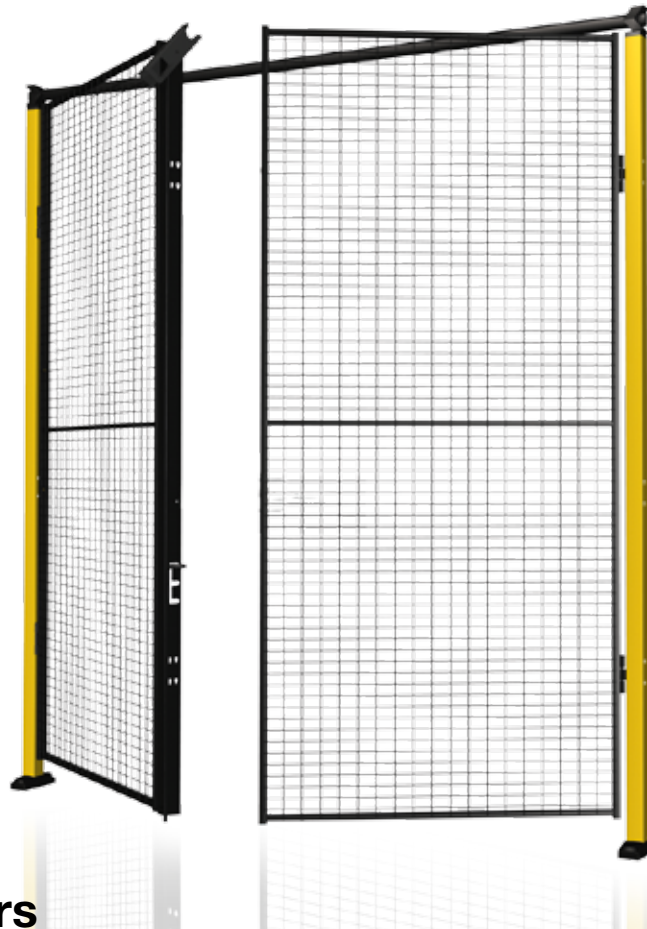

X-Guard® Doors

X-Guard® is a completely new range of machine guard that complies with the Machine Directive's new demands on permanent guards from 29 December, 2009. With its wide range of standard components and accessories, X-Guard® is guaranteed to cover all possible needs.

X-Guard® was launched in 2008 and since then has constantly evolved with new doors. Today we have two different types of doors, hinge- and sliding doors. They are available in our three standard heights but can also be build higher with help of our extension. The doors are customized by the different choices you make, from opening dimensions to the type of lock.

In standard color, rails and accessories comes in RAL 9011.

Doors

- Hinge- and sliding doors
 - RAL 9011
 - Customized according to customers choice
-

Axellent Product information

» X-Guard® Doors

Technical data (50x50 post)

| Art.no | Height (mm) | Max width (mm) | Description |
|-------------|-------------|----------------|--|
| D10-XXX150A | Max 2300 | 1500 | Single hinge door with top frame |
| D10-XXX150B | Min 2300 | 1500 | Single hinge door with top frame |
| D11-XXX150A | Max 2300 | 1500 | Single hinge door without top frame |
| D11-XXX150B | Min 2300 | 1500 | Single hinge door without top frame |
| D12-140300 | 1400 | 2x 1500 | Double hinge door |
| D12-200300 | 2000 | 2x 1500 | Double hinge door |
| D12-230300 | 2300 | 2x 1500 | Double hinge door |
| D12-275300 | 2755 | 2x1500 | Double hinge door |
| D12-305300 | 3055 | 2x1500 | Double hinge door |
| D20-XXX100A | Max 2300 | 1000 | Single sliding door |
| D20-XXX100B | Min 2300 | 1000 | Single sliding door |
| D20-XXX140A | Max 2300 | 1400 | Single sliding door |
| D20-XXX140B | Min 2300 | 1400 | Single sliding door |
| D20-XXX220A | Max 2300 | 2200 | Single sliding door |
| D20-XXX220B | Min 2300 | 2200 | Single sliding door |
| D20-XXX310A | Max 2300 | 3100 | Single sliding door |
| D20-XXX310B | Min 2300 | 3100 | Single sliding door |
| D20-XXX570A | Max 2300 | 5700 | Single sliding door |
| D20-XXX570B | Min 2300 | 5700 | Single sliding door |
| D22-XXX290A | Max 2300 | 2900 | Sliding door with centre lock |
| D22-XXX290B | Min 2300 | 2900 | Sliding door with centre lock |
| D22-XXX590A | Max 2300 | 5900 | Sliding door with centre lock |
| D22-XXX590B | Min 2300 | 5900 | Sliding door with centre lock |
| D23-200300R | Min 2000 | 2x 1500 | Double sliding door, right, with 2-step rail |
| D23-200300L | Min 2000 | 2x 1500 | Double sliding door, left, with 2-step rail |
| D23-230300R | Min 2300 | 2x1500 | Double sliding door, right, with 2-step rail |
| D23-230300L | Min 2300 | 2x 1500 | Double sliding door, left, with 2-step rail |
| D23-200450R | Min 2000 | 3x 1500 | Triple sliding door, right, with 3-step rail |
| D23-200450L | Min 2000 | 3x 1500 | Triple sliding door, left, with 3-step rail |
| D23-230450R | Min 2300 | 3x 1500 | Triple sliding door, right, with 3-step rail |
| D23-230450L | Min 2300 | 3x 1500 | Triple sliding door, left, with 3-step rail |
| D24-200140 | 2000 | 2x 1400 | Double sliding door |
| D24-230140 | 2300 | 2x 1400 | Double sliding door |
| D24-200290 | 2000 | 2x2900 | Double sliding door |
| D24-230290 | 2300 | 2x2900 | Double sliding door |
| D26-XXX090 | Max 2300 | 0900 | Single sliding door without rail |
| D26-XXX140 | Max 2300 | 1400 | Single sliding door without rail |
| D27-XXX180 | Max 2300 | 1800 | Double sliding door without rail |
| D27-XXX280 | Max 2300 | 2800 | Double sliding door without rail |
| D28-140190L | 1400 | 1900 | Single sliding door without rail left |
| D28-140190R | 1400 | 1900 | Single sliding door without rail right |
| D28-140290L | 1400 | 2900 | Single sliding door without rail left |
| D28-140290R | 1400 | 2900 | Single sliding door without rail right |
| D28-200190L | 2000 | 1900 | Sliding door without rail left |
| D28-200190R | 2000 | 1900 | Sliding door without rail right |
| D28-200290L | 2000 | 2900 | Sliding door without rail left |
| D28-200290R | 2000 | 2900 | Sliding door without rail right |

CONTINUE »

Axellent Product information

» X-Guard® Doors

Technical data (50x50 post)

| Art.no | Height (mm) | Max width (mm) | Description |
|-------------|-------------|----------------|--|
| D28-230190L | 2300 | 1900 | Sliding door without rail left |
| D28-230190R | 2300 | 1900 | Sliding door without rail right |
| D28-230290L | 2300 | 2900 | Sliding door without rail left |
| D28-230290R | 2300 | 2900 | Sliding door without rail right |
| D29-XXX380 | Max 2300 | 2x1900 | Sliding door without rail, centre lock |
| D29-XXX480 | Max 2300 | 2x1900+1900 | Sliding door without rail, centre lock |
| D29-XXX580 | Max 2300 | 2x2900 | Sliding door without rail, centre lock |

(Standard panels are used for doors)

Technical data (70x70 post)

| Art.no | Height (mm) | Max width (mm) | Description |
|-------------|-------------|----------------|--|
| D30-XXX150A | 2300 | 1500 | Single hinge door, incl. top frame |
| D30-XXX150B | 2300 | 1500 | Single hinge door, incl. top frame |
| D32-200300 | 2000 | Max 2x1500 | Double hinge door |
| D32-230300 | 2300 | Max 2x1500 | Double hinge door |
| D32-275300 | 2755 | Max 2x1500 | Double hinge door |
| D32-305300 | 3055 | Max 2x1500 | Double hinge door |
| D40-XXX100A | Max 2300 | 1000 | Single sliding door |
| D40-XXX100B | Min 2300 | 1000 | Single sliding door |
| D40-XXX140A | Max 2300 | 1400 | Single sliding door |
| D40-XXX140B | Min 2300 | 1400 | Single sliding door |
| D40-XXX220A | Max 2300 | 2200 | Single sliding door |
| D40-XXX220B | Min 2300 | 2200 | Single sliding door |
| D40-XXX310A | Max 2300 | 3100 | Single sliding door |
| D40-XXX310B | Min 2300 | 3100 | Single sliding door |
| D40-XXX570A | Max 2300 | 5700 | Single sliding door |
| D40-XXX570B | Min 2300 | 5700 | Single sliding door |
| D42-XXX290A | Max 2300 | 2900 | Sliding door with centre lock |
| D42-XXX290B | Min 2300 | 2900 | Sliding door with centre lock |
| D42-XXX590A | Max 2300 | 5900 | Sliding door with centre lock |
| D42-XXX590B | Min 2300 | 5900 | Sliding door with centre lock |
| D43-200300L | 2000 | Max 2x1500 | Sliding door, left with 2-step rail |
| D43-200300R | 2000 | Max 2x1500 | Sliding door, right with 2-step rail |
| D43-200450L | 2000 | Max 3x1500 | Sliding door, left with 3-step rail |
| D43-200450R | 2000 | Max 3x1500 | Sliding door, right with 3-step rail |
| D43-230300L | 2300 | Max 2x1500 | Sliding door, left with 2-step rail |
| D43-230300R | 2300 | Max 2x1500 | Sliding door, right with 2-step rail |
| D43-230450L | 2300 | Max 3x1500 | Sliding door, left with 3-step rail |
| D43-230450R | 2300 | Max 3x1500 | Sliding door, right with 3-step rail |
| D44-200140 | 2000 | Max 2x1400 | Double sliding door overlapped |
| D44-200290 | 2000 | Max 2x2900 | Double sliding door overlapped |
| D44-230140 | 2300 | Max 2x1400 | Double sliding door overlapped |
| D44-230290 | 2300 | Max 2x2900 | Double sliding door overlapped |
| D46-XXX090 | Max 2300 | 900 | Sliding door without rail |
| D46-XXX140 | Max 2300 | 1400 | Sliding door without rail |
| D46-XXX290 | Max 2300 | 2900 | Sliding door without rail |
| D47-XXX580 | Max 2300 | 2x2900 | Sliding door without rail with centre lock |

(Som dörrblad används standardpaneler)


Axellent Product information

» X-Guard® Doors


Single hinge door.



Double hinge door, access for wider goods, pallet truck etc, max opening 2x1500 mm.

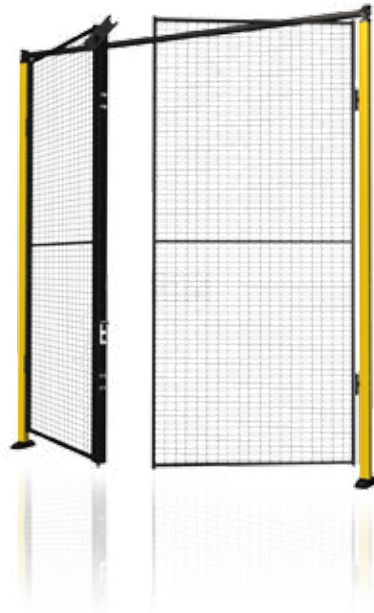

Single sliding door, can be built with a max opening of 5700 mm.

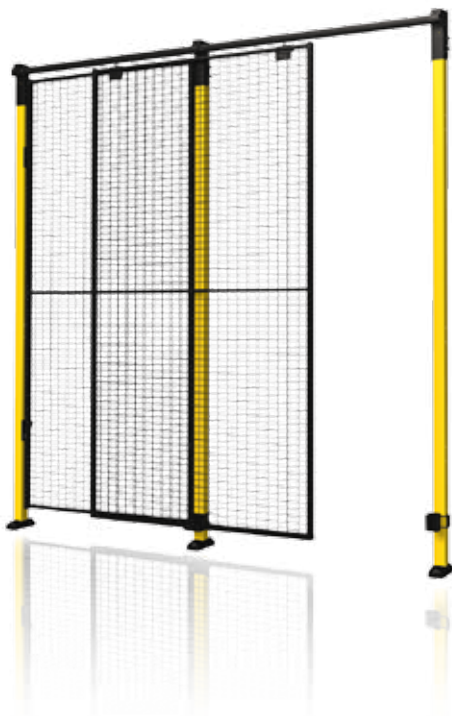


Double sliding door, for cramped areas and for two feed positions from the machine. Available in sizes up to 2 x 2900 mm.



Axellent Product information

» X-Guard® Doors


Single sliding door without rail, has an opening of three meters and no upper limitations. The door is perfect when handling large volumes carried by overhead crane or forklift. Maximum width 3000 mm and maximum height 2300 mm.

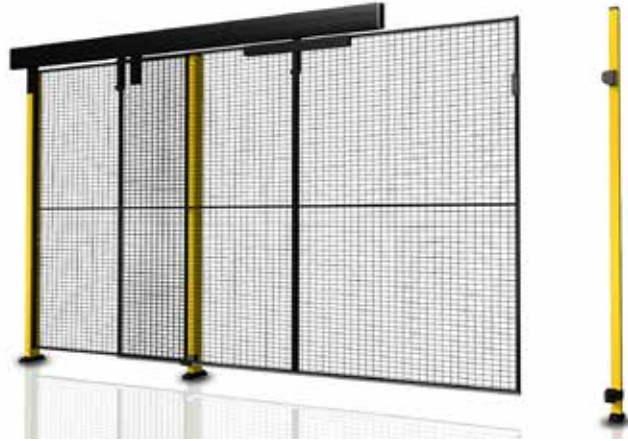

Sliding door with centre lock, where the door blades are pushed in opposite directions. Maximum width is 5900 mm.




Double sliding without rail, has an opening of 6 meters and no upper limitation. The door is perfect when handling large volumes carried by overhead crane or forklift. Maximum width 2 x 3000 mm and maximum height 2300 mm.

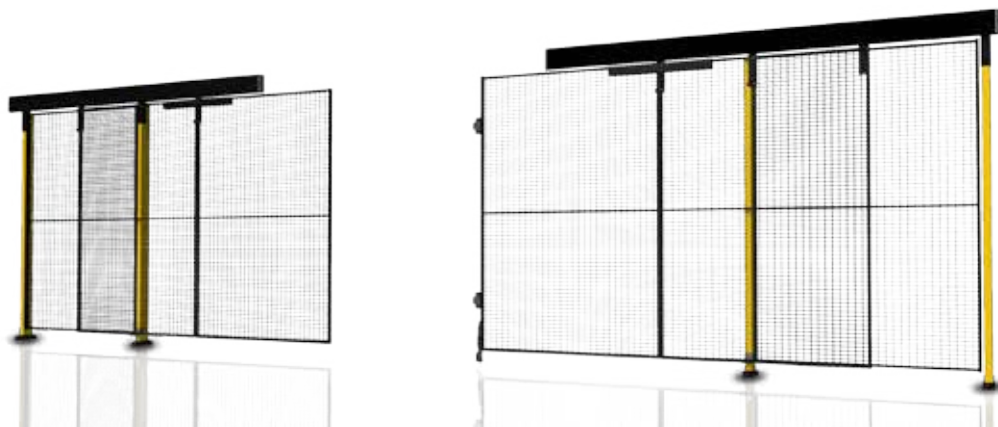

Axelent Product information

» X-Guard® Doors

Double sliding door with 2-step rail, is used where a large opening is required but where there is limited space at the side. The panels overlap each other instead of sliding to the side. Maximum width 2 x 1500 mm and maximum height 2300 mm.

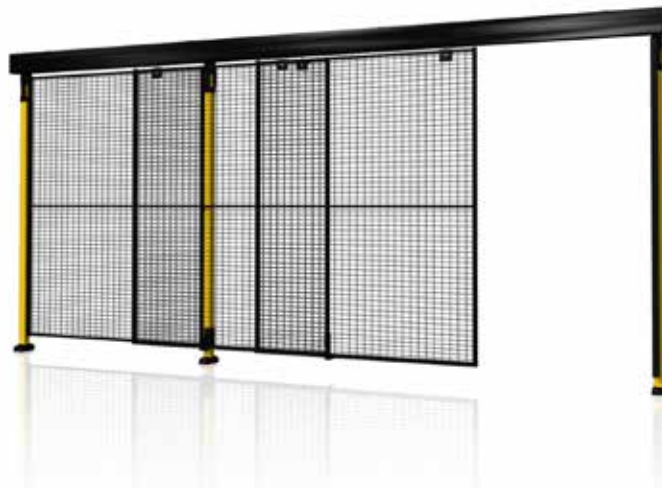

Triple sliding door with 3-step rail, is used where a large opening is required but where there is limited space at the side. The panels overlap each other instead of sliding to the side. Maximum width 3 x 1500 mm and maximum height 2300 mm.




Single sliding door without rail. An ideal solution for an opening with no overhead obstruction and where the need for a large opening isn't necessary. Maximum widths 900 mm and 1400 mm, maximum height 2300 mm.




Axellent Product information

» X-Guard® Doors

Double sliding door without rail, with centre lock. An ideal solution for an opening with no overhead obstruction and where the need for a large opening isn't necessary. Maximum widths 1800 mm and 2800 mm, maximum height 2300 mm.

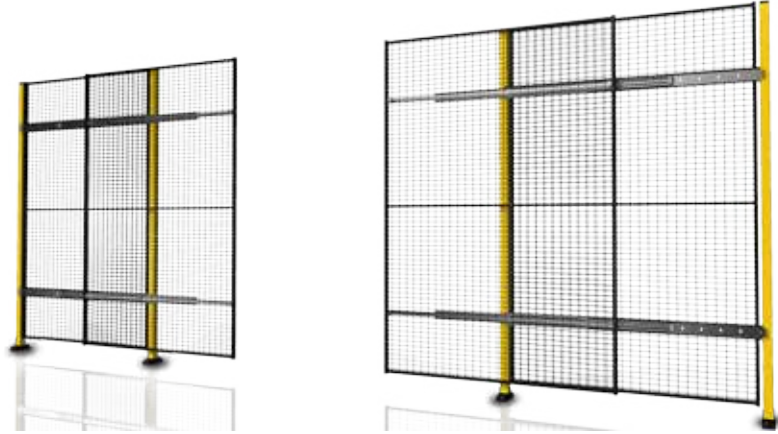

Single sliding door without rail. An ideal solution for an opening with no overhead obstruction and where the need for a large opening is necessary. Maximum widths 1900 mm and 2900 mm, maximum height 2300 mm.

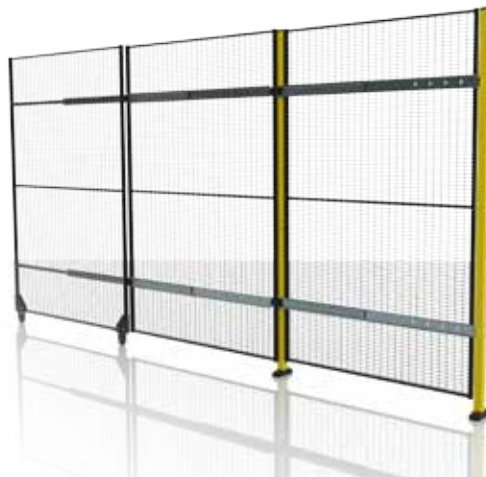

Sliding doors without rail, with centre lock. An ideal solution for an opening with no overhead obstruction and where the need for a large opening is necessary. Maximum widths 3800 mm, 4800 and 5800 mm, maximum height 2300 mm.

